

Conference System Accessories

Power Adapter		5
HCS-ADP12V	Power Adapter (12 V DC, 2.5A).....	5
HCS-ADP12V5A	Power Adapter (12 V DC, 5A, for HCS-8679 series multimedia terminal).....	5
HCS-ADP15V	Power Adapter (15V DC, 2.7 A, for HCS-5300/5301/5302/5390/5391 conference unit, HCS-8319N and HCS-8619).....	6
HCS-ADP24V	Power Adapter (24 V DC, 1.5 A, for HCS-5300TH).....	6
HCS-ADP24V2	Power Adapter (24 V DC, 1.5 A, for HCS-5300TWN).....	7
HCS-ADP48V	Power Adapter (48 V DC, 1.875 A, for HCS-8368T/50, HCS-8685BM).....	7
TES-ADP5V	Power Adapter (5 V DC, 2.0 A, for HCS-5380/5381 series conference unit).....	8
Cables and Connectors		9
CBL2SS-01CMP	1 m 2-pin Cable (with two sockets, CMP).....	9
CBL4PK-01CMP	1 m Power Adapter Cable (for device supplies power to HCS-8338, HCS-8348, HCS-8368, HCS-8668, HCS-8669 and HCS-8638, CMP).....	9
CBL4PS-05CMP	5 m 4-pin Extension Cable (with a plug and a socket, CMP).....	10
CBL4PS-10CMP	10 m 4-pin Extension Cable (with a plug and a socket, CMP).....	10
CBL4PS-20CMP	20 m 4-pin Extension Cable (with a plug and a socket, CMP).....	10
CBL4PS-30CMP	30 m 4-pin Extension Cable (with a plug and a socket, CMP).....	10
CBL4PS-40CMP	40 m 4-pin Extension Cable (with a plug and a socket, CMP).....	10
CBL4PS-50CMP	50 m 4-pin Extension Cable (with a plug and a socket, CMP).....	10
CBL4C-CMP	Professional Extension Cable for Conference System (4-pin, 18AWGx4C, CMP).....	10
CBL4PT-02ACMP	2 m Power Branch Cable (for HCS-8338, HCS-8348, HCS-8368, HCS-8668, HCS-8669 and HCS-8638 series Paperless Multi-media Congress Terminal, CMP).....	11
CBLS-UTP	Professional Extension Cable for Conference System.....	11
CBLS-FTP-CMP	Professional Extension Cable for Conference System (CMP).....	11
CBL6PP-02	2 m 6-pin Extension Cable (with two plugs).....	12
CBL6PP-02CMP	2 m 6-pin Extension Cable (with two plugs, CMP).....	12
CBL6PS-01	1 m 6-pin Extension Cable (with a plug and a socket).....	12
CBL6PS-02	2 m 6-pin Extension Cable (with a plug and a socket).....	12
CBL6PS-03	3 m 6-pin Extension Cable (with a plug and a socket).....	12
CBL6PS-05	5 m 6-pin Extension Cable (with a plug and a socket).....	12
CBL6PS-10	10 m 6-pin Extension Cable (with a plug and a socket).....	12
CBL6PS-20	20 m 6-pin Extension Cable (with a plug and a socket).....	12
CBL6PS-30	30 m 6-pin Extension Cable (with a plug and a socket).....	12
CBL6PS-40	40 m 6-pin Extension Cable (with a plug and a socket).....	12
CBL6PS-50	50 m 6-pin Extension Cable (with a plug and a socket).....	12
CBL6PS-80	80 m 6-pin Extension Cable (with a plug and a socket).....	12
CBL6PS-03CMP	3 m 6-pin Extension Cable (with a plug and a socket, CMP).....	12
CBL6PS-05CMP	5 m 6-pin Extension Cable (with a plug and a socket, CMP).....	12
CBL6PS-10CMP	10 m 6-pin Extension Cable (with a plug and a socket, CMP).....	12
CBL6PS-20CMP	20 m 6-pin Extension Cable (with a plug and a socket, CMP).....	12
CBL6PS-30CMP	30 m 6-pin Extension Cable (with a plug and a socket, CMP).....	12

CBL6PS-40CMP	40 m 6-pin Extension Cable (with a plug and a socket, CMP).....	12
CBL6PS-50CMP	50 m 6-pin Extension Cable (with a plug and a socket, CMP).....	12
CBL5300-05	5 m Dedicated Transceiver Cable.....	13
CBL5300-10	10 m Dedicated Transceiver Cable.....	13
CBL5300-20	20 m Dedicated Transceiver Cable.....	13
CBL5300-30	30 m Dedicated Transceiver Cable.....	13
CBL5300-40	40 m Dedicated Transceiver Cable.....	13
CBL5300-50	50 m Dedicated Transceiver Cable.....	13
CBL5300-60	60 m Dedicated Transceiver Cable.....	13
CBL5300-05CMP	5 m Dedicated Transceiver Cable (CMP).....	13
CBL5300-10CMP	10 m Dedicated Transceiver Cable (CMP).....	13
CBL5300-20CMP	20 m Dedicated Transceiver Cable (CMP).....	13
CBL5300-30CMP	30 m Dedicated Transceiver Cable (CMP).....	13
CBL5300-40CMP	40 m Dedicated Transceiver Cable (CMP).....	13
CBL5300-50CMP	50 m Dedicated Transceiver Cable (CMP).....	13
CBL5300-60CMP	60 m Dedicated Transceiver Cable (CMP).....	13
CBLRG-59	Coaxial-cable (75 Ω, Ø 5 mm) (unit: meter).....	13
CBLRG-6/U	Coaxial-cable (75 Ω, Ø 7 mm) (unit: meter).....	13
CBL8PS-01	1 m 8-pin Extension Cable (with a male plug and a female plug).....	14
CBL8PS-03	3 m 8-pin Extension Cable (with a male plug and a female plug).....	14
CBL8PS-05	5 m 8-pin Extension Cable (with a male plug and a female plug).....	14
CBL8PS-10	10 m 8-pin Extension Cable (with a male plug and a female plug).....	14
CBL8PS-20	20 m 8-pin Extension Cable (with a male plug and a female plug).....	14
CBL8PS-30	30 m 8-pin Extension Cable (with a male plug and a female plug).....	14
CBL8PS-40	40 m 8-pin Extension Cable (with a male plug and a female plug).....	14
CBL8PS-50	50 m 8-pin Extension Cable (with a male plug and a female plug).....	14
CBL8PP-02	2 m 8-pin Extension Cable (with two male plugs).....	14
CBL-8P2RJ45S-01	1 m 8-pin to RJ45 Converter Cable (with an 8-pin male plug and a RJ45 socket, cat.5 Extension Cable with drain wire).....	15
CBL-8S2RJ45S-01	1 m 8-pin to RJ45 Converter Cable (with an 8-pin female plug and a RJ45 socket, cat.5 Extension Cable with drain wire).....	15
CBL8P2RJ45-01	1 m 8-pin to RJ45 Convert Cable (with an 8-pin male plug and a RJ45 plug, cat.5e Extension Cable with drain wire).....	16
CBL8S2RJ45-01	1 m 8-pin to RJ45 Convert Cable (with an 8-pin female plug and a RJ45 plug, cat.5e Extension Cable with drain wire).....	16
CBLRJ45-02	2 m Ethernet Extension Cable (with drain wire and shielded RJ45 plugs).....	17
CBLRJ45-05	5 m Ethernet Extension Cable (with drain wire and shielded RJ45 plugs).....	17
CBLRJ45-10	10 m Ethernet Extension Cable (with drain wire and shielded RJ45 plugs).....	17
CBLRJ45-20	20 m Ethernet Extension Cable (with drain wire and shielded RJ45 plugs).....	17
CBLRJ45-30	30 m Ethernet Extension Cable (with drain wire and shielded RJ45 plugs).....	17
CBLRJ45-40	40 m Ethernet Extension Cable (with drain wire and shielded RJ45 plugs).....	17
CBLRJ45-50	50 m Ethernet Extension Cable (with drain wire and shielded RJ45 plugs).....	17

CBLCAT5E	Cat.5e Extension Cable (with drain wire, 305 m per roll, unit: meter).....	17
RJ45-PLUG	Shielded RJ45 plug.....	17
HCS-4352T/50	6-pin Cable Splitter (1 input & 3 outputs, for HCS-4100/50 and HCS-8300 series).....	18
HCS-4853T	6-pin to 8-pin Cable Splitter (1 input (6P-DIN) & 3 outputs (8P-DIN), for connection between HCS-8685 Interpretation Unit and HCS-8300M series, HCS-4100M/50 series, HCS-5100MA/B series).....	18
BNC-M	BNC Connector (plug).....	19
HCS-4353N/06	6-pin Grounding Cable Connection Socket (for HCS-3900, HCS-4100/50 and HCS-8300 series).....	19
DIN-6PM	Detachable 6-pin Standard Plug (male).....	19
DIN-6SF	Solderable 6DIN Standard Socket (insulating).....	19
DIN-4PM	Detachable 4-pin Standard Plug(male).....	20
DIN-4PF	Detachable 4-pin Standard Socket (female).....	20
DIN-4SF	Solderable 4P-DIN Standard Socket (insulating).....	20
DIN-8PM	Detachable 8P-DIN Standard Plug(male).....	20
DIN-8PF	Detachable 8P-DIN Standard Socket (female).....	20
DIN-8SF	Solderable 8P-DIN Standard Socket (insulating).....	20
HCS-4853N/08	8-pin Grounding Cable Connection Socket (for HCS-4800 and HCS-8600 series).....	21
CBLCLASP	Cable Connector Clasps.....	21
Multifunctional Storage Case	22
HCS-852KS	Multifunctional Storage Case(inner height 620 mm, free fit Foam Insert, holds up to 24 stem microphones in the case cover).....	22
HCS-852S-MIC	Foam Insert (height 54mm, for 21 pcs stem microphones not exceeding 47cm).....	--
HCS-852S-CMU	Foam Insert (for 1 pc main unit with 2U high + 20 m extension cable).....	22
HCS-852S-CMUA	Foam Insert (for 1 pc HCS-5300M/A, HCS-5100M/A, HCS-5100M/B, HCS-8600M or HCS-4800M series main unit + 20 m extension cable)	23
HCS-852S-5300TD	Foam Insert (for 1 pc HCS-5300CHG/08 + 2 pcs HCS-5300TD).....	23
HCS-852S-5300D	Foam Insert (for 8 pcs 5300 wireless conference units).....	24
HCS-852S-5300CHG/06	Foam Insert (height 45mm, for 2 pcs HCS-5300CHG/06 or HCS-5300CHG/06A).....	24
HCS-852S-5300CHG	Foam Insert (for 2 pcs HCS-5300CHG/08).....	25
HCS-852S-GStyle	Foam Insert (for 10 pcs HCS-4886/87/88 + 6 pcs stem microphones).....	25
HCS-852S-1U	Foam Insert (for 2 pcs units of 1U height and attached cables).....	26
HCS-852S-4338	Foam Insert(for 16 pcs HCS-4338/HCS-3938 + 10 pcs stem microphones + attached cables).....	26
HCS-852S-4860	Foam Insert (for 8 pcs HCS-4860 series congress units).....	27
HCS-852S-4866	Foam Insert (for 8 pcs HCS-4866/50 series congress units).....	27
HCS-852S-4890	Foam Insert (for 12 pcs HCS-4890/50 series congress units + 12 pcs stem microphones).....	28
HCS-852S-4891R	Foam Insert (for 8 pcs HCS-4891R/50(/2M) series congress units).....	28
HCS-852S-8368A	Foam Insert (for 5 pcs HCS-8368A/50 series tabletop Congress Terminals).....	29
HCS-852S-8385	Foam Insert (for 6 pcs HCS-8385N interpreter units).....	29
HCS-852S-8668	Foam Insert (height 215mm, for 4 pcs HCS-8668/HCS-8665 series congress terminals).....	--
HCS-852S-4890N	Foam Insert (height 125mm, for 12 pcs HCS-4890N/80 series tabletop congress unit).....	--
HCS-852S-1857	Foam Insert (height 45mm, for 20 pcs HCS-1857CA13, HCS-1857CA15 , HCS-1857CA18 gooseneck microphone).....	--
HCS-852S-4865	Foam Insert (height 140mm,for 8 pcs HCS-4865 series congress units).....	--

HCS-852S-4860X	Foam Insert (height 6mm, for 10 pcs HCS-4860X series congress units).....	--
HCS-852S-5381R	Foam Insert (height 165mm, for 8 pcs HCS-5381R series conference units).....	--
HCS-852S-5390	Foam Insert (height 100mm, for 8 pcs HCS-5390/HCS-5391 series conference units).....	--
HCS-852S-4112M/10	Foam Insert (height 125mm, for 4 pcs HCS-4112M/10 audio distributor).....	--
HCS-852S-5100TN	Foam Insert (height 180mm, for 1 pc HCS-5100T+ 2 pcs HCS-8385N).....	--
HCS-853KS	Transport Cabinet (inner height 15U).....	30
HCS-854KS	Portable Multifunctional Storage Case (inner height 299 mm, free fit Foam Insert).....	31
HCS-854S-CMU	Foam Insert (height 118mm, for 1 pc main unit with 2U high).....	32
HCS-854S-MIC	Foam Insert (height 55mm, for 11 stem microphones).....	32
HCS-854S-4338	Foam Insert (height 120mm, for 10 pcs HCS-4338).....	33
HCS-854S-4886	Foam Insert (height 98mm, for 3 pcs HCS-4886/87/88 + 4 pcs stem microphones).....	33
HCS-854S-5100T	Foam Insert (height 178mm, for 1 pc HCS-5100T).....	34
HCS-854S-5300	Foam Insert (height 98mm, for 4 pcs HCS-5300 wireless conference units + 4 pcs stem microphones).....	34
HCS-854S-1860	Foam Insert (height 120mm, for 8 pcs HCS-1860NMC+4 pcs HCS-1860ST).....	--
Interpreter Booth and Shipping Case		35
HCS-851A/02	Interpreter Booth (accommodates 2 interpreters, internal dimensions is 200×160×160 cm, aluminum alloy framework convenience for disassembly, with a shipping case, total weight is 260 kg).....	35
HCS-851K	Interpreter Booth Shipping Case (for HCS-851A/02).....	35
HCS-851A/03	Interpreter Booth (accommodates 3 interpreters, internal dimensions is 200×240×160 cm, aluminum alloy framework convenience for disassembly, with 2 shipping case, total weight is 350 kg).....	36
HCS-851KT	Interpreter Booth Shipping Case (for HCS-851A/03, HCS-851K needed).....	36
Sign-in Accessories		37
HCS-4345NTK/80	Contactless IC-Card Encoder (black).....	37
HCS-3926	Contactless IC-Card (100pcs/set, 86×54 mm).....	37
HCS-4345NF/50	Fingerprint Scanner (Gray).....	38

HCS-ADP12V Power Adapter



Features

- Used for supplying power to HCS-4857 series congress unit and other devices

Technical Specifications

Electrical

Power supply.....AC 100 V - 240 V, 50 Hz / 60 Hz
 Output.....12 V DC, 2.5 A
 Connector.....UL, CE or VDE type, according to the sales area

Mechanical

Cable length.....3 m
 Dimensions (h x w x d).....32 x 95 x 50 mm
 Weight.....0.3 kg
 Color.....Black

Ordering Information

HCS-ADP12V.....Power Adapter (12 V DC, 2.5A)

HCS-ADP12V5A Power Adapter



Features

- Used for supplying power to HCS-8679 series multimedia terminal

Technical Specifications

Electrical

Power supply.....AC 100 V - 240 V, 50 Hz / 60 Hz
 Output.....12 V DC, 5 A
 Connector.....UL, CE or VDE type, according to the sales area

Mechanical

Cable length.....3.5 m
 Dimensions (h x w x d).....34 x 118 x 52 mm
 Weight.....0.4 kg
 Color.....Black

Ordering Information

HCS-ADP12V5A.....Power Adapter (12 V DC, 5 A, for HCS-8679 series multimedia terminal)

HCS-ADP15V Power Adapter



Features

- Used for supplying power to HCS-5300/5301/5302/5390/5391 conference unit, HCS-8319N and HCS-8619

Technical Specifications

Electrical

Power supply.....AC 100 V - 240 V, 50 Hz / 60 Hz
 Output.....15 V DC, 2.7 A
 Connector.....UL, CE or VDE type, according to the sales area

Mechanical

Cable length.....3 m
 Dimensions (h x w x d).....28 x 95 x 45 mm
 Weight.....0.3 kg
 Color.....Black

Ordering Information

HCS-ADP15V.....Power Adapter (15V DC, 2.7 A, for HCS-5300/5301/5302/5390/5391 conference unit, HCS-8319N and HCS -8619)

HCS-ADP24V Power Adapter



Features

- Used for supplying power to HCS-5300TH/80 Digital Infrared Transceiver

Technical Specifications

Electrical

Power supply.....AC 100 V - 240 V, 50 Hz / 60 Hz
 Output.....24 V DC, 1.5 A
 Connector.....UL, CE or VDE type, according to the sales area

Mechanical

Cable length.....3 m
 Dimensions (h x w x d).....28 x 95 x 45 mm
 Weight.....0.3 kg
 Color.....Black

Ordering Information

HCS-ADP24V.....Power Adapter (24 V DC, 1.5 A, for HCS-5300TH)

HCS-ADP24V2 Power Adapter



Features

- Used for supplying power to HCS-5300TWN Digital Infrared Transceiver

Technical Specifications

Electrical

Power supply.....AC 100 V - 240 V, 50 Hz / 60 Hz
 Output.....24 V DC, 1.5 A
 Connector.....UL, CE or VDE type, according to the sales area

Mechanical

Cable length.....3 m
 Dimensions (h x w x d).....28 x 95 x 45 mm
 Weight.....0.3 kg
 Color.....Black

Ordering Information

HCS-ADP24V2.....Power Adapter (24 V DC, 1.5 A,
 for HCS-5300TWN)

HCS-ADP48V Power Adapter



Features

- Used for supplying power to HCS-8368T/50

Technical Specifications

Electrical

Power supply.....AC 100 V - 240 V, 50 Hz / 60 Hz
 Output.....48 V DC, 1.875 A
 Connector.....UL, CE or VDE type, according to the sales area

Mechanical

Cable length.....3 m
 Dimensions (h x w x d).....33 x 150 x 62 mm
 Weight.....0.5 kg
 Color.....Black

Ordering Information

HCS-ADP48V.....Power Adapter (48 V DC, 1.875 A,
 for HCS-8368T/50, HCS-8685BM)

TES-ADP5V Power Adapter



Features

- Used for charging HCS-5380/5381 series conference unit

Technical Specifications

Electrical

Power supply.....AC 100 V - 240 V, 50 Hz / 60 Hz
 Output.....5 V DC, 2.0 A
 Connector.....UL, CE or VDE type, according to the sales area

Mechanical

Cable length.....1 m
 Dimensions (h x w x d).....43 x 39 x 27 mm
 Weight.....50 g
 Color.....White

Ordering Information

TES-ADP5V.....Power Adapter (5 V DC, 2.0 A, for
 HCS-5380/5381 series conference
 unit)

CBL2SS
2-pin Cable for Conference System



Features

- Connecting HCS-8300KMX with HCS-8300PM/HCS-8300PM2
- Standard connectors (2P aviation socket at each end)
- Length: 1 m

Ordering Information

CBL2SS-01CMP1 m 2-pin Cable (with two sockets, CMP)

CBL4PK
Power Adapter Cable



Features

- For device supplies power to HCS-8338, HCS-8348, HCS-8368, HCS-8668, HCS-8669 and HCS-8638 series Paperless Multi-media Congress Terminal
- Standard connectors (a 2P aviation socket at one end and a 4P-DIN socket at the opposite end)
- Length: 1 m

Ordering Information

CBL4PK-01CMP.....1 m Power Adapter Cable (for device supplies power to HCS-8338, HCS-8348, HCS-8368, HCS-8668, HCS-8669 and HCS-8638, CMP)

CBL4PS 4-pin Extension Cable



Features

- Extension cable for connecting HCS-8338 and HCS-8348 series Paperless Multi-media Congress Terminal
- Standard connectors (a plug at one end and a socket at the opposite end)
- Optional: 5 m, 10 m, 20 m, 30 m, 40 m and 50 m available

Ordering Information

CBL4PS-05CMP	5 m 4-pin Extension Cable (with a plug and a socket, CMP)
CBL4PS-10CMP	10 m 4-pin Extension Cable (with a plug and a socket, CMP)
CBL4PS-20CMP	20 m 4-pin Extension Cable (with a plug and a socket, CMP)
CBL4PS-30CMP	20 m 4-pin Extension Cable (with a plug and a socket, CMP)
CBL4PS-40CMP	20 m 4-pin Extension Cable (with a plug and a socket, CMP)
CBL4PS-50CMP	50 m 4-pin Extension Cable (with a plug and a socket, CMP)

4-pin Professional Extension Cable for Conference System



Features

- For embedding system cables
- Conductor: 18AWGx4C

Ordering Information

CBL4C-CMP.....Professional Extension Cable for Conference System (4-pin, 18AWGx4C, CMP)

CBL4PT Power Branch Cable



Features

- Power branch cable for "daisy-chain" supplying power to HCS-8338, HCS-8348, HCS-8368, HCS-8668, HCS-8669 and HCS-8638 series Paperless Multi-media Congress Terminal
- Input end: 4P-DIN plug
- Output end: 4P-DIN socket and a DC plug
- Length: 2 m

Ordering Information

CBL4PT-02ACMP.....2 m Power Branch Cable (for HCS-8338, HCS-8348, HCS-8368, HCS-8668, HCS-8669 and HCS-8638 series Paperless Multi-media Congress Terminal, CMP)

Professional Extension Cable for Conference System



Features

- For embedding system cables
- CBLS-UTP: S-UTP Core of Cat.5e Extension Cable :with 4x2x(7x0.2)+96x0.12 Steel wire braided shielding mesh
- CBLS-FTP-CMP: S-FTP Core of Cat.5e Extension Cable :with 4x2x(7x0.2)+96x0.12 Steel wire braided shielding mesh

Ordering Information

CBLS-UTP.....Professional Extension Cable for Conference System

CBLS-FTP-CMP.....Professional Extension Cable for Conference System (CMP)

CBL6PP 6-pin Extension Cable



Features

- Connecting conference main units
- Standard connectors (6P-DIN plug at each end)
- Cable: S-UTP CABLE or FTP CABLE (CMP)
- Cable conductor: 4x2x(7x0.2)+96x0.12
- Length: 2 m
- Used for HCS-3900 series, HCS-4100/50 series and HCS-8300 series

Ordering Information

CBL6PP-02.....2 m 6-pin Extension Cable (with two plugs)

CBL6PP-02CMP2 m 6-pin Extension Cable (with two plugs, CMP)

CBL6PS 6-pin Extension Cable



Features

- Connecting conference main unit with contribution unit when cable extensions are needed
- Standard connectors (6P-DIN plug and 6P-DIN socket)
- Cable: S-UTP CABLE or FTP CABLE (CMP)
- Cable conductor: 4x2x(7x0.2)+96x0.12
- Optional: 1 m, 2 m, 3 m, 5 m, 10 m, 20 m, 30 m, 40 m, 50 m and 80 m available
- Used for HCS-3900 series, HCS-4100/50 series and HCS-8300 series

Ordering Information

CBL6PS-01...1 m 6-pin Extension Cable (with a plug and a socket)

CBL6PS-02...2 m 6-pin Extension Cable (with a plug and a socket)

CBL6PS-03...3 m 6-pin Extension Cable (with a plug and a socket)

CBL6PS-05...5 m 6-pin Extension Cable (with a plug and a socket)

CBL6PS-10...10 m 6-pin Extension Cable (with a plug and a socket)

CBL6PS-20...20 m 6-pin Extension Cable (with a plug and a socket)

CBL6PS-30...30 m 6-pin Extension Cable (with a plug and a socket)

CBL6PS-40...40 m 6-pin Extension Cable (with a plug and a socket)

CBL6PS-50...50 m 6-pin Extension Cable (with a plug and a socket)

CBL6PS-80...80 m 6-pin Extension Cable (with a plug and a socket)

CBL6PS-03CMP.....3 m 6-pin Extension Cable
(with a plug and a socket, CMP)

CBL6PS-05CMP.....5 m 6-pin Extension Cable
(with a plug and a socket, CMP)

CBL6PS-10CMP.....10 m 6-pin Extension Cable
(with a plug and a socket, CMP)

CBL6PS-20CMP.....20 m 6-pin Extension Cable
(with a plug and a socket, CMP)

CBL6PS-30CMP.....30 m 6-pin Extension Cable
(with a plug and a socket, CMP)

CBL6PS-40CMP.....40 m 6-pin Extension Cable
(with a plug and a socket, CMP)

CBL6PS-50CMP.....50 m 6-pin Extension Cable
(with a plug and a socket, CMP)

CBL5300 Dedicated Transceiver Cable



Features

- Dedicated cable for HCS-5300TD/TDS
- 1 × 6P-DIN male plug
- 1 × 6P-DIN female socket
- Optional: 5 m, 10 m, 20 m, 30 m, 40 m, 50 m and 60 m available
- Ø 7 mm
- Color: black
- Attention: cable looks identical to CBL6PS but pin-assignment differs! Please do not mix up!

Ordering Information

CBL5300-05.....	5 m Dedicated Transceiver Cable
CBL5300-10.....	10 m Dedicated Transceiver Cable
CBL5300-20.....	20 m Dedicated Transceiver Cable
CBL5300-30.....	30 m Dedicated Transceiver Cable
CBL5300-40.....	40 m Dedicated Transceiver Cable
CBL5300-50.....	50 m Dedicated Transceiver Cable
CBL5300-60.....	60 m Dedicated Transceiver Cable
CBL5300-05CMP.....	5 m Dedicated Transceiver Cable (CMP)
CBL5300-10CMP.....	10 m Dedicated Transceiver Cable (CMP)
CBL5300-20CMP.....	20 m Dedicated Transceiver Cable (CMP)
CBL5300-30CMP.....	30 m Dedicated Transceiver Cable (CMP)
CBL5300-40CMP.....	40 m Dedicated Transceiver Cable (CMP)
CBL5300-50CMP.....	50 m Dedicated Transceiver Cable (CMP)
CBL5300-60CMP.....	60 m Dedicated Transceiver Cable (CMP)

Coaxial-cable



Features

- Equivalent impedance: 75 Ohm
- Ø 5 mm (CBLRG-59)
- Ø 7 mm (CBLRG-6/U)
- Length of per roll: 300 meter

Ordering Information

CBLRG-59.....	Coaxial-cable (75 Ω)
CBLRG-6/U.....	Coaxial-cable (75 Ω)

CBL8PS 8-pin Extension Cable



Features

- Connecting conference main unit with contribution unit when cable extensions are needed
- Both ends are 8P-DIN male plug and 8P-DIN female plug
- Cable: S-UTP CABLE or FTP CABLE
- Cable conductor: 4x2x(7x0.2)+96x0.12
- Optional: 3 m, 5 m, 10 m, 20 m, 30 m, 40 m and 50 m available
- Used for HCS-4800 series and HCS-8600 series

Ordering Information

CBL8PS-01.....	1 m 8-pin Extension Cable (with a male plug and a female plug)
CBL8PS-03.....	3 m 8-pin Extension Cable (with a male plug and a female plug)
CBL8PS-05.....	5 m 8-pin Extension Cable (with a male plug and a female plug)
CBL8PS-10.....	10 m 8-pin Extension Cable (with a male plug and a female plug)
CBL8PS-20.....	20 m 8-pin Extension Cable (with a male plug and a female plug)
CBL8PS-30.....	30 m 8-pin Extension Cable (with a male plug and a female plug)
CBL8PS-40.....	40 m 8-pin Extension Cable (with a male plug and a female plug)
CBL8PS-50.....	50 m 8-pin Extension Cable (with a male plug and a female plug)

CBL8PP 8-pin Extension Cable



Features

- Connecting conference main units
- Loop connection for congress units
- Standard connectors (8P-DIN plug at each end)
- Cable: S-UTP CABLE or FTP CABLE
- Cable conductor: 4x2x(7x0.2)+96x0.12
- Length: 2 m
- Used for HCS-4800 series and HCS-8600 series

Ordering Information

CBL8PP-02..... 2 m 8-pin Extension Cable (with two male plugs)

CBL8P2RJ45S
8-pin to RJ45 converter cable



Features

- Suitable for HCS-4800 series and HCS-8600 series conference systems
- Standard connectors (8P-DIN male plug at one end and a RJ45 socket at the opposite end)
- Cable: FTP CABLE with drain wire
- Length: 1 m

Ordering Information

CBL8P2RJ45S-01..... 1 m 8-pin Convert Cable (with an 8-pin male plug and a RJ45 socket, cat.5e Extension Cable with drain wire)

CBL8S2RJ45S
8-pin to RJ45 converter cable



Features

- Suitable for HCS-4800 series and HCS-8600 series conference systems
- Standard connectors (8P-DIN female plug at one end and a RJ45 socket at the opposite end)
- Cable: FTP CABLE with drain wire
- Length: 1 m

Ordering Information

CBL8S2RJ45S-01..... 1 m 8-pin Convert Cable (with an 8-pin female plug and a RJ45 socket, cat.5e Extension Cable with drain wire)

CBL8S2RJ45
8-pin to RJ45 converter cable



Features

- Suitable for HCS-4800 series and HCS-8600 series conference systems
- Standard connectors (8P-DIN female plug at one end and a RJ45 plug at the opposite end)
- Cable: FTP CABLE with drain wire
- Length: 1 m

Ordering Information

CBL8S2RJ45-011 m 8-pin Convert Cable (with an 8-pin female plug and a RJ45 plug, cat.5e Extension Cable with drain wire)

CBL8P2RJ45
8-pin to RJ45 converter cable



Features

- Suitable for HCS-4800 series and HCS-8600 series conference systems
- Standard connectors (8P-DIN male plug at one end and a RJ45 plug at the opposite end)
- Cable: FTP CABLE with drain wire
- Length: 1 m

Ordering Information

CBL8P2RJ45-011 m 8-pin Convert Cable (with an 8-pin male plug and a RJ45 plug, cat.5e Extension Cable with drain wire)

CBLRJ45 Ethernet Extension Cable



Features

- Cable: FTP CABLE with drain wire
- Standard connectors (shielded RJ45 plug at each end)
- Cable conductor: 4x2x(7x0.2)+7x0.2
- Metal shield connected with drain wire
- Optional: 3 m, 5 m, 10 m, 20 m, 30 m, 40 m and 50 m available
- Used for HCS-4800 series, HCS-8600 series and education equipment

Ordering Information

CBLRJ45-02.....	2 m Ethernet Extension Cable (with drain wire and shielded RJ45 plugs)
CBLRJ45-05.....	5 m Ethernet Extension Cable (with drain wire and shielded RJ45 plugs)
CBLRJ45-10.....	10 m Ethernet Extension Cable (with drain wire and shielded RJ45 plugs)
CBLRJ45-20.....	20 m Ethernet Extension Cable (with drain wire and shielded RJ45 plugs)
CBLRJ45-30.....	30 m Ethernet Extension Cable (with drain wire and shielded RJ45 plugs)
CBLRJ45-40.....	40 m Ethernet Extension Cable (with drain wire and shielded RJ45 plugs)
CBLRJ45-50.....	50 m Ethernet Extension Cable (with drain wire and shielded RJ45 plugs)

CBLCAT5E



Features

- For embedding system cables
- Cable: FTP CABLE with drain wire
- Cable conductor: 4x2x(7x0.2)+7x0.2
- Length of per roll: 305 meter

Ordering Information

CBLCAT5E.....	Cat.5e Extension Cable (with drain wire, 305 m per roll)
---------------	---

RJ45- PLUG




Features

- For Ethernet cable making
- With metal shield
- Used in conjunction with FTP CABLE with drain wire
- Metal shield connected with drain wire

Ordering Information

RJ45-PLUG.....	Shielded RJ45 plug
----------------	--------------------

HCS-4352T/50 6-pin Cable Splitter

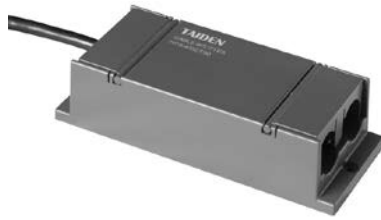

Features

- Relay facility, amplification of the communication signals
- 6P-DIN interfaces, "1 in / 3 out " structure for connection
- 2m-cable with a 6P-DIN connector at the input end
- Three 6PIN output interfaces, can drive 70-meter long extension cable
- Dimensions (h x w x d): 35 x 149 x 90 mm

Ordering Information

HCS-4352T/50.....6-pin Cable Splitter (1 input & 3 outputs, for HCS-4100/50 and HCS-8300 series)

HCS-4853T Cable Splitter



Features

- Relay facility, amplification of the communication signals
- "1 in / 3 out " structure for connection
- For connection between HCS-8685 Interpretation Unit and HCS-8300M series, HCS-4100M/50 series, HCS-5100MA/B series
- 2m-cable with a 6P-DIN connector at the input end
- Three 8PIN output interfaces, can drive 60-meter long extension cable
- Dimensions (h x w x d): 35 x 149 x 90 mm

Ordering Information

HCS-4853T.....6-pin to 8-pin Cable Splitter (1 input (6P-DIN) & 3 outputs (8P-DIN), for connection between HCS-8685 Interpretation Unit and HCS-8300M series, HCS-4100M/50 series, HCS-5100MA/B series)

BNC-M BNC Connector



Features

- Used to connect HCS-5100M and HCS-5100T or between HCS-5100T
- Used with Coaxial-cable

Ordering Information

BNC-M.....BNC Connector (plug)

Detachable 6P-DIN Standard Plug



Features

- For soldering to 6P-DIN cable
- Removable DIN standard connector (6PIN-DIN)

Ordering Information

DIN-6PM.....Detachable 6P-DIN Standard Plug (male)

HCS-4353N/06 6-pin Grounding Cable Connection Socket



Features

- For embedding cables to connect conference unit
- For connecting to HCS-3900 series, HCS-4100/50 series or HCS-8300 series conference unit
- Interface: 2 x 6P-DIN female socket
- With 6P-DIN male and female cables for connection to conference systems
- The circuit ground pin of the socket is isolated from the protective earth

Ordering Information

HCS-4353N/06.....6-pin Grounding Cable Connection Socket
(for HCS-3900, HCS-4100/50 and HCS-8300 series)

Solderable 6P-DIN Standard Socket



Features

- For soldering to 6P-DIN cable
- Solderable 6P-DIN female socket with insulated isolation
- The circuit ground pin of the socket is isolated from the protective earth

Ordering Information

DIN-6SF.....Solderable 6P-DIN Standard Socket (insulating)

Detachable 4P-DIN Standard Plug and Socket



Features

- For soldering to 4P-DIN cable
- Removable DIN standard male connector (4-PIN)

Ordering Information

DIN-4PM.....Detachable 4P-DIN Standard Plug(male)
 DIN-4PF.....Detachable 4P-DIN Standard Plug(female)

Detachable 8P-DIN Standard Plug and Socket



Features

- For soldering to 8P-DIN cable
- Removable DIN standard male connector (8-PIN)

Ordering Information

DIN-8PM.....Detachable 8P-DIN Standard Plug(male)
 DIN-8PF.....Detachable 8P-DIN Standard Plug(female)

Solderable 4P-DIN Standard Socket



Features

- For 4P-DIN extension cable welding
- Solderable 4P-DIN standard socket insulated isolation
- The circuit ground pin of the socket is isolated from the protective earth

Ordering Information

DIN-4SF.....Solderable 4P-DIN Standard Socket (insulating)

Solderable 8P-DIN Standard Socket



Features

- For 8P-DIN extension cable welding
- Solderable 8P-DIN standard socket with insulated isolation
- The circuit ground pin of the socket is isolated from the protective earth

Ordering Information

DIN-8SF.....Solderable 8P-DIN Standard Socket (insulating)

HCS-4853N/08
8-pin Grounding Cable Connection Socket



Features

- For embedding cables to connect conference unit
- For connecting to HCS-4800 series conference unit and HCS-8635 series congress terminal with 2 x8P-DIN female socket
- With 8P-DIN male cables to conference system connection
- The circuit ground pin of the socket is isolated from the protective earth

Ordering Information

HCS-4853N/08.....8-pin Grounding Cable Connection Socket
 (for HCS-4800 and HCS-8600 series)

CBLCLAPS
Cable Connector Clasps



Features

- For fixing between detachable 4-pin/6-pin/8-pin standard male and female connectors

Ordering Information

CBLCLASP.....Cable Connector Clasps

HCS-852KS Multifunctional Storage Case



Features

- Used for storing and transporting TAIDEN series products

Technical Specifications

Mechanical

Dimensions h x w x d (mm)

Outside 890 x 760 x 590

Inside 620 x 705 x 535

Net weight 31.0 kg

Color Blue

Ordering Information

HCS-852KS... Multifunctional Storage Case (inner height 620 mm, free fit Foam Insert, holds up to 24 stem microphones in the case cover)

HCS-852S-CMU Foam Insert



Features

- Used to secure Conference System Main Unit and Extension Cable
- Stores up to 1 pc main unit with 2U high + 20-meter extension cable

Technical Specifications

Mechanical

Dimensions h x w x d (mm) 118 x 700 x 530

Net weight 1.0 kg

Color Black

Ordering Information

HCS-852S-CMU Foam Insert (for 1 pc main unit with 2U high+ 20 m extension cable)

**HCS-852S-CMUA
Foam Insert**



Features

- Used to secure Conference System Main Unit and Extension Cable
- Stores up to 1 pc main unit with 2U high + 20-meter extension cable

Technical Specifications

Mechanical

Dimensions h x w x d (mm).....120 x 700 x 530
 Net weight.....1.0 kg
 Color.....Black

Ordering Information

HCS-852S-CMUA.....Foam Insert (for 1 pc HCS-5300M/A, HCS-5100M/A, HCS-5100M/B, HCS-8600M or HCS-4800M series main unit + 20 m extension cable)

**HCS-852S-5300TD
Foam Insert**



Features

- Used to secure HCS-5300CHG/08 Charging Unit and HCS-5300TD Digital Infrared Transceiver
- Stores up to 1 pc HCS-5300CHG/08 + 2 pcs HCS-5300TD

Technical Specifications

Mechanical

Dimensions h x w x d (mm).....100 x 700 x 530
 Net weight.....1.0 kg
 Color.....Black

Ordering Information

HCS-852S-5300TD.....Foam Insert (for 1 pc HCS-5300CHG/08 + 2 pcs HCS-5300TD)

**HCS-852S-5300D
Foam Insert**



Features

- Used to secure HCS-5300 Series Digital Infrared Wireless Conference Units
- Stores up to 8 pcs HCS-5300 Digital Infrared Wireless Conference Units

Technical Specifications

Mechanical

Dimensions h x w x d (mm).....100 x 700 x 530
 Net weight.....1.0 kg
 Color.....Black

Ordering Information

HCS-852S-5300D.....Foam Insert (for 8 pcs HCS-5300 wireless conference units)

**HCS-852S-5300CHG/06
Foam Insert**



Features

- Used to secure HCS-5300CHG/06 and HCS-5300CHG/06A Charging Units
- Stores up to 2 pcs HCS-5300CHG/06 or HCS-5300CHG/06A

Technical Specifications

Mechanical

Dimensions h x w x d (mm).....45 x 700 x 530
 Net weight.....0.6 kg
 Color.....Black

Ordering Information

HCS-852S-5300CHG/06.....Foam Insert (height 45mm, for 2 pcs HCS-5300CHG/06 or HCS-5300CHG/06A)

**HCS-852S-5300CHG
Foam Insert**



Features

- Used to secure HCS-5300CHG/08 Charging Units
- Stores up to 2 pcs HCS-5300CHG/08

Technical Specifications

Mechanical

Dimensions h x w x d (mm).....100 x 700 x 530
 Net weight.....1.0 kg
 Color.....Black

Ordering Information

HCS-852S-5300CHG.....Foam Insert (for 2 pcs HCS-5300CHG/08)

**HCS-852S-GStyle
Foam Insert**



Features

- Used to secure HCS-4886/87/88 congress units and stem microphones
- Stores up to 10 pcs HCS-4886/87/88 congress units + 6 pcs stem microphones

Technical Specifications

Mechanical

Dimensions h x w x d (mm).....150 x 700 x 530
 Net weight.....1.0 kg
 Color.....Black

Ordering Information

HCS-852S-Gstyle.....Foam Insert (for 10 pcs HCS-4886/87/88 + 6 pcs stem microphones)

**HCS-852S-1U
Foam Insert**



Features

- Used to secure 2 pcs devices of 1U height and attached cables
- Stores up to 2 pcs devices of 1U height and attached cables

Technical Specifications

Mechanical

Dimensions h x w x d (mm).....55 x 700 x 530
 Net weight.....0.7 kg
 Color.....Black

Ordering Information

HCS-852S-1UFoam Insert (for 2 pcs devices of 1U height and attached cables)

**HCS-852S-4338
Foam Insert**



Features

- Used to secure HCS-3638/HCS-4338/HCS-3938 conference units, stem microphones and attached cables
- Stores up to 16 pcs HCS-3638/HCS-4338/HCS-3938 conference units + 10 pcs stem microphones + attached cables

Technical Specifications

Mechanical

Dimensions h x w x d (mm).....150 x 700 x 530
 Net weight.....1.0 kg
 Color.....Black

Ordering Information

HCS-852S-4338Foam Insert (for 16 pcs HCS-3638/HCS-4338/HCS-3938 + 10 pcs stem microphones + attached cables)

**HCS-852S-4860
Foam Insert**



Features

- Used to secure HCS-4860 series congress units
- Stores up to 8 pcs HCS-4860 series congress units

Technical Specifications

Mechanical

Dimensions h x w x d (mm).....140 x 700 x 530
 Net weight.....1.6 kg
 Color.....Black

Ordering Information

HCS-852S-4860.....Foam Insert (for 8 pcs HCS-4860 series congress units)

**HCS-852S-4866
Foam Insert**



Features

- Used to secure HCS-4866/50 series congress units
- Stores up to 8 pcs HCS-4866/50 series congress units

Technical Specifications

Mechanical

Dimensions h x w x d (mm).....150 x 700 x 530
 Net weight.....1.6 kg
 Color.....Black

Ordering Information

HCS-852S-4866.....Foam Insert (for 8 pcs HCS-4866/50 series congress units)

**HCS-852S-4890
Foam Insert**



Features

- Used to secure HCS-4890/50 series congress units and stem microphones
- Stores up to 12 pcs HCS-4890/50 series congress units + 12 pcs stem microphones

Technical Specifications

Mechanical

Dimensions h x w x d (mm).....130 x 700 x 530
 Net weight.....1.3 kg
 Color.....Black

Ordering Information

HCS-852S-4890.....Foam Insert (for 12 pcs HCS-4890/50 series congress units + 12 pcs stem microphones)

**HCS-852S-4891R
Foam Insert**



Features

- Used to secure HCS-4891R/50/(2M) series congress units
- Stores up to 8 pcs HCS-4891R/50/(2M) series congress units

Technical Specifications

Mechanical

Dimensions h x w x d (mm).....130 x 700 x 530
 Net weight.....1.3 kg
 Color.....Black

Ordering Information

HCS-852S-4891R.....Foam Insert (for 8 pcs HCS-4891R/50/(2M) series congress units)

**HCS-852S-8368A
Foam Insert**



Features

- Used to secure HCS-8368A/50 series tabletop Multimedia Congress Terminals
- Stores up to 5 pcs HCS-8368A/50 series tabletop Multimedia Congress Terminals

Technical Specifications

Mechanical

Dimensions h x w x d (mm).....225 x 700 x 530
 Net weight.....1.4 kg
 Color.....Black

Ordering Information

HCS-852S-8368A.....Foam Insert (for 5 pcs HCS-8368A/50 series tabletop Congress Terminals)

**HCS-852S-8385
Foam Insert**



Features

- Used to secure HCS-8385N and HCS-8685 interpreter units
- Stores up to 6 pcs HCS-8385N and HCS-8685 interpreter units

Technical Specifications

Mechanical

Dimensions h x w x d (mm).....120 x 700 x 530
 Net weight.....1.2 kg
 Color.....Black

Ordering Information

HCS-852S-8385.....Foam Insert (for 6 pcs HCS-8385N or HCS-8685 interpreter units)

HCS-853KS Transport Cabinet



Features

- Used for storing and transporting TAIDEN series main units

Technical Specifications

Mechanical

Dimensions h x w x d (mm).....890 x 590 x 545
 Net weight.....33.7 kg
 Color.....Blue

Ordering Information

HCS-853KS.....Transport Cabinet (inner height 15U)

HCS-854KS Portable Multifunctional Storage Case



Features

- Used for storing and transporting TAIDEN series products

Technical Specifications

Mechanical

Dimensions h x w x d (mm)

Outside..... 338 x 663 x 496

Inside..... 299 x 575 x 406

Net weight..... 10.5 kg

Color..... Black

Ordering Information

HCS-854KS..... Portable Multifunctional Storage Case
(inner height 299 mm, free fit Foam Insert)

HCS-854S-CMU Foam Insert



Features

- Used to secure Conference System Main Unit
- Stores up to 1 pc main unit with 2U high

Technical Specifications

Mechanical

Dimensions h x w x d (mm).....118 x 573 x 408
 Net weight.....0.6 kg
 Color.....Black

Ordering Information

HCS-854S-CMU.....Foam Insert (for 1 pc main unit with 2U high)

HCS-854S-MIC Foam Insert



Features

- Used to secure stem microphones
- Stores up to 11 pcs stem microphones

Technical Specifications

Mechanical

Dimensions h x w x d (mm).....55 x 573 x 408
 Net weight.....0.6 kg
 Color.....Black

Ordering Information

HCS-854S-MIC.....Foam Insert (for 11 pcs stem microphones)

**HCS-8524S-4338
Foam Insert**



Features

- Used to secure HCS-3638/HCS-4338 conference units
- Stores up to 10 pcs HCS-3638/HCS-4338 conference units

Technical Specifications

Mechanical

Dimensions h x w x d (mm).....120 x 573 x 408
 Net weight.....0.7 kg
 Color.....Black

Ordering Information

HCS-854S-4338.....Foam Insert (for 10 pcs HCS-3638/HCS-4338)

**HCS-854S-4886
Foam Insert**



Features

- Used to secure HCS-4886/87/88 congress units and stem microphones
- Stores up to 3 pcs HCS-4886/87/88 congress units + 4 pcs stem microphones

Technical Specifications

Mechanical

Dimensions h x w x d (mm).....98 x 573 x 408
 Net weight.....0.7 kg
 Color.....Black

Ordering Information

HCS-854S-4886.....Foam Insert (for 3 pcs HCS-4886/87/88 + 4 pcs stem microphones)

**HCS-854S-5100T
Foam Insert**



Features

- Used to secure HCS-5100T Digital Infrared Radiator
- Stores up to 1 pc HCS-5100T

Technical Specifications

Mechanical

Dimensions h x w x d (mm).....178 x 573 x 408
 Net weight.....0.9 kg
 Color.....Black

Ordering Information

HCS-854S-5100T.....Foam Insert (for 1 pc HCS-5100T)

**HCS-854S-5300
Foam Insert**



Features

- Used to secure HCS-5300 wireless conference units and stem microphones
- Stores up to 4 pcs HCS-5300 wireless conference units + 4 pcs stem microphones

Technical Specifications

Mechanical

Dimensions h x w x d (mm).....98 x 573 x 408
 Net weight.....0.7 kg
 Color.....Black

Ordering Information

HCS-854S-5300.....Foam Insert (for 4 pcs HCS-5300 wireless conference units + 4 pcs stem microphones)

HCS-851A/02 Interpreter Booth



HCS-851A/02



HCS-851K

Features

- Compliant to ISO 4043 and GB 50524-2010
- Odorless, antistatic, fire-retardant material
- Optimum insulation and sound absorption
- Hinged door (with observation window 0.20 m × 0.20 m), opens outwards, operates silently
- Two front windows and two side windows (high: 0.87 m); lower edge of the window: 0.79 m from booth floor
- Booth to hall (and vice versa) - sound pressure level difference: ≥ 24 dB (1 kHz)
- Reverberation time inside the booth: between 0.3 and 0.5 s (octave bands from 125 Hz to 4000 Hz, booth unoccupied)
- Ventilation system (purging 8 times per hour at least) of interpretation booth uses low-noise exhaust fan
- Internal dimensions of the booth h × w × d (cm): 200 × 160 × 160, accommodates two interpreters
- Overall dimensions of the booth h × w × d (cm): 204 × 172 × 172
- Shipping needs HCS-851K Interpreter Booth Shipping Case
 - ♦ Dimensions of HCS-851K h × w × d (cm): 110×209×79
 - ♦ Weight (incl. the booth): 260 kg

Ordering Information

HCS-851A/02.....Interpreter Booth (accommodates 2 interpreters, internal dimensions is 200×160×160 cm, aluminum alloy framework convenience for disassembly, with a shipping case, total weight is 260 kg)

HCS-851K.....Interpreter Booth Shipping Case (for HCS-851A/02)

HCS-851A/03 Interpreter Booth



HCS-851A/03



HCS-851K



HCS-851KT

Features

- Compliant to ISO 4043 and GB 50524-2010
- Odorless, antistatic, fire-retardant material
- Optimum insulation and sound absorption
- Hinged door (with observation window 0.20 m x 0.20 m), opens outwards, operates silently)
- Three front windows and two side windows (high: 0.87 m); lower edge of the window: 0.79 m from booth floor
- Booth to hall (and vice versa) - sound pressure level difference: ≥ 24 dB (1 kHz)
- Reverberation time inside the booth: between 0.3 and 0.5 s (octave bands from 125 Hz to 4000 Hz, booth unoccupied)
- Ventilation system (purging 8 times per hour at least) of interpretation booth uses low-noise exhaust fan
- Internal dimensions h x w x d (cm): 200x240x160, accommodates three interpreters
- Overall dimensions h x w x d (cm): 204x252x172
- Shipping needs HCS-851K and HCS-851KT Interpreter Booth Shipping Case
 - ♦ Dimensions of HCS-851K h x w x d (cm): 110x75x209
 - ♦ Dimensions of HCS-851KT h x w x d (cm): 91x215x40
 - ♦ Weight (incl. the booth): 350 kg

Ordering Information

HCS-851A/03..... Interpreter Booth (accommodates 3 interpreters, internal dimensions is 200x240x160 cm, aluminum alloy framework convenience for disassembly, with 2 shipping case, total weight is 350kg)

HCS-851KT.....Interpreter Booth Shipping Case
(for HCS-851A/03, HCS-851K needed)

HCS-4345NTK/80 Contactless IC-Card Encoder



Features

- Encoding unit to produce the contactless IC-Card. The IC-Card may be used to grant access to a sign-in system
- PC connection via type A USB interface
- Smart design

Technical Specifications

Interconnections

- Type A USB interface for connection to computer

Mechanical

Mounting.....Tabletop
 Dimensions (h x w x d).....24 x 91 x 91 mm
 Weight.....0.3 kg
 Color.....Black (PANTONE 419 C)

Ordering Information

HCS-4345NTK/80.....Contactless IC-Card Encoder (black)

HCS-3926 Contactless IC-Card



Features

- Contactless IC-Card

Ordering Information

HCS-3926.....Contactless IC-Card (100pcs/set, 86x54 mm)

HCS-4345NF/50 Fingerprint Scanner



Function

- Cooperates with PC to take the delegate's fingerprint to realize biometric authentication with high reliability
- PC connection via type A USB interface
- Smart design

Technical Specifications

Interconnections

- Type A USB interface for connection to computer

Mechanical

Mounting.....Tabletop
 Dimensions (h x w x d)22 x 48 x 75 mm
 Weight.....0.1 kg
 Color.....Gray (PANTONE Warm Gray 10 U)

Ordering Information

HCS-4345NF/50.....Fingerprint Scanner (Gray)